

NEW

UFO High BAY - Emergency Battery Backup Driver

E2-EM-UFO-25W-170VAC

E2-EM-UFO-40W-170VAC



PRODUCT DESCRIPTION :

E2 Lighting's 25W and 40W emergency driver, enables normal and emergency operation that can maintain illumination of an LED fixture for a minimum of 90 minutes in the event of a power loss. When AC power is restored, the driver automatically returns to charging mode. Also includes a test button and button installation faceplate.

FEATURES AND STANDARDS :

- Self-testing
- Battery: over temperature protection
- Low energy consumption CEC Title 20 compliant
- Constant output power
- High output voltage
- Listed to UL 924 and tested to CSA 22.2 NO. 141 field or factory installation
- UL listed for US and Canada


PRODUCT SPECIFICATION :

- Model - EMUFO-25170-YY, EMUFO-40170-YY
- Emergency Power - 25W, 40W
- Input Voltage - 100-347Vac, 50/60Hz
- Input Current - 200mA max
- Input Power Rating - 10W max
- Output Voltage - 170Vdc
- Recharge Time - 24 hours
- Discharge Time - 90 minutes
- Battery - Li-ion
- Ambient Temperature - 0°C to 50°C (32°F to 122°F)
- Weight - 7.3lbs
- Warranty - 5 years limited


RoHS COMPLIANT

Dimensions

Flexible Conduit : 13"

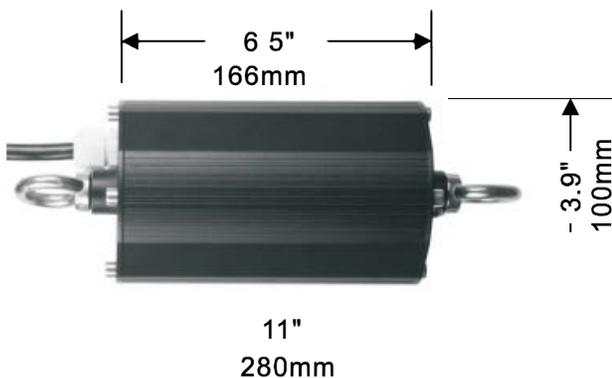

WARRANTY:

E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at www.e2lightingusa.com.